# Mondeo Electric Treatment Table Specifications Sheet





Toll Free: 1.800.418.0830

www.skinact.com www.spaandequipment.com

International: 818.834.6640

#### NOTICE

No part of this document may be photocopied, reproduced, or translated into any other language without prior written consent of Spa and Equipment/SkinAct.

The information in this document is subject to change without notice at any time and should not be construed as a commitment by Spa and Equipment/SkinAct.

Spa and Equipment/SkinAct assumes no responsibility for any errors that may be in this document, nor does it make expressed or implied warranty with regard to this material, including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose.

Spa and Equipment/SkinAct shall not be liable for incidental or consequential damages arising out of the furnishing, performance, or use of this document and the program material which it describes.













Toll Free: 1.800.418.0830

www.skinact.com www.spaandequipment.com

International: 818.834.6640


# **Measurements**





# **Measurements** 11.5" 19" 18.5" 10" Base Dimensions: 38.5" x 23" 35.5" 25.5" KIN/CT Spa Equipment

## **Measurements**

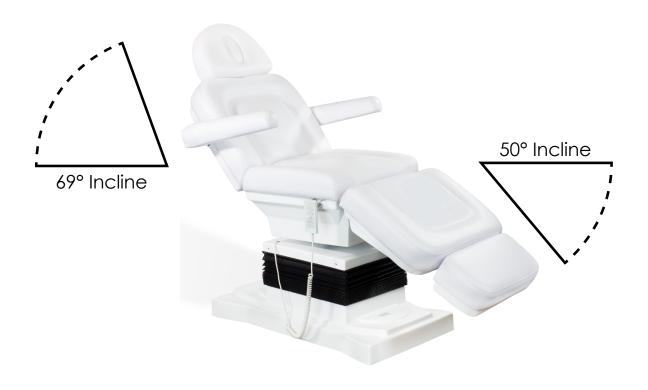



# **Highlights**

#### **Movements:**

- Electric backrest, leg rest, seat tilt, seat rotation, and height adjustments
- Manual removable arm rests
- Manual head rest extension
- Manual leg rest extension

#### **Dimensions/Specifications:**

- Length without leg rest extension or head rest: 60"
- Length with leg rest extension and head rest: 82"
- Length with leg rest and head rest extended out: 90"
- Width without arm rests: 25.5"
- Width with arm rests: 35.5"
- Heights: 27" 32"
- BASE ONLY Dimensions: 38.5" L x 23" W
- Backrest angle: 0° to 69° inclined
- Leg rest angle: 0° to 50° declined
- Seat tilt angle: 0° to 13°
- Rotation: 0° to 180°
- Capacity of 350 lbs
- Cushion thickness: 4.5"
- Color available: White
- \* All height measurements are from the ground to the top of the cushion \*
- \*\* All measurements have a 0.25 to 0.75 inch tolerance \*\*

### Warranty:

1-year warranty

