# Hydraulic Spa Treatment Table 90° Full Sitting Position Specifications Sheet





Toll Free: 1.800.418.0830

www.skinact.com www.spaandequipment.com

International: 818.834.6640

#### **NOTICE**

No part of this document may be photocopied, reproduced, or translated into any other language without prior written consent of Spa and Equipment/SkinAct.

The information in this document is subject to change without notice at any time and should not be construed as a commitment by Spa and Equipment/SkinAct.

Spa and Equipment/SkinAct assumes no responsibility for any errors that may be in this document, nor does it make expressed or implied warranty with regard to this material, including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose.

Spa and Equipment/SkinAct shall not be liable for incidental or consequential damages arising out of the furnishing, performance, or use of this document and the program material which it describes.














Toll Free: 1.800.418.0830

www.skinact.com www.spaandequipment.com

International: 818.834.6640

## **Measurements**

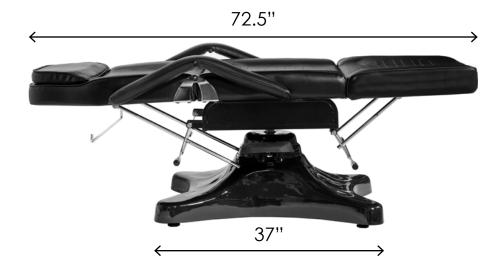





## **Measurements**







## **Optional Foot Cover**





## **Highlights**

#### **Movements:**

- Manual backrest angle adjustment
- Manual leg rest angle adjustment
- Manual height adjustment (hydraulic pump assisted)
- Manual removable arm rests

#### **Dimensions/Specifications:**

• Length: 72.5"

Width without arm rests: 25"Width with arm rests: 32.5"

• Heights: 24.5" - 31.5"

• Base dimensions (BASE ONLY): 37" x 24"

• Backrest angle: 0° flat to 90° incline

Leg rest angle: 0° flat to 85° decline

• Weight: 140 lbs

• Capacity of 300 lbs

• Cushion thickness: 4"

- Colors available: White or Black
- Unit arrives fully assembled
- Comes with a FREE beauty stool in matching color
- Snazzy fiberglass hydraulic pump cover
- Rotates 360° (Only when the chair is raised to the highest setting)
- \* All heights measured from ground to top of seat cushion \*
- \*\* All measurements have a 0.25 to 0.75 inch tolerance \*\*

### **Warranty Information:**

1-year warranty

